


CHARGERS



Model "SPC"

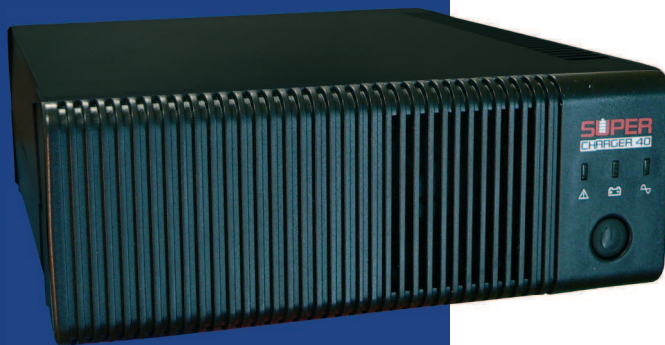

Model "PIC"

SPC series

12/24VDC - 20/40A

Adjustable: 24VDC/20A or 12VDC/40A

For AGM, Gel or NiCd batteries

3 Stage charger, Bulk, Absorption and float

90 to 220Vac input voltage range

DC output 12 / 24 Vdc switch

Reverse polarity protection

Short circuit resistant

LED indication

Temperatur compensation charging

Dimensions: 255x224x80mm, 1,8kg

CE conformity

PIC Series

48VDC - 8-25A

For AGM or Gel batteries

Temperatur compensation charging

3 Stage charger, Bulk, Absorption and Float

Для батарей AGM и гелевых

Protection от поляризации

Aluminium case


Reverse polarity protection

Short circuit resistant

LED indication

CE conformity

CHARGERS

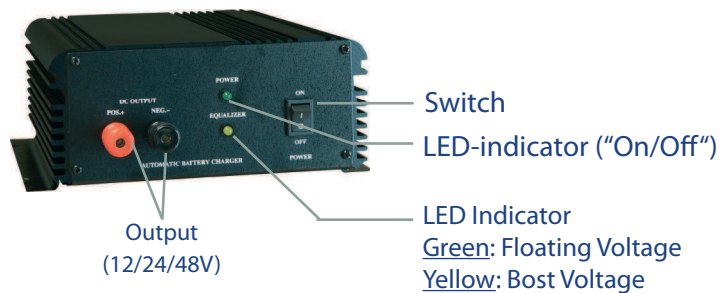

Technical data ▶▶

Model	Capacity (A)	Voltage (V)	Dimensions (WxDxH - mm)	Weight (kg)
PIC0212	2	12	62x115x33	0,4
PIC0312	3	12	90x180x50	0,5
PIC0412	4	12	90x180x50	0,8
PIC0512	5	12	90x180x50	0,8
PIC0612	6	12	90x180x50	0,8
PIC1012	10	12	90x180x50	0,9
PIC1212	12	12	210x220x90	2,5
PIC2512	25	12	210x270x90	3,0
PIC5012	50	12	210x395x90	4,5

PIC0224	2	24	62x115x33	0,4
PIC0324	3	24	90x180x50	0,8
PIC0425	4	24	90x180x50	0,8
PIC0525	5	24	90x180x50	0,9
PIC0624	6	24	90x180x50	0,9
PIC1024	10	24	210x220x90	2,5
PIC1424	14	24	210x270x90	3,0
PIC2524	25	24	210x395x90	4,5
PIC0848	8	24	210x220x90	3,0
PIC5012	50	12	210x395x90	4,5