


SOLAR

CHARGER CONTROLLER

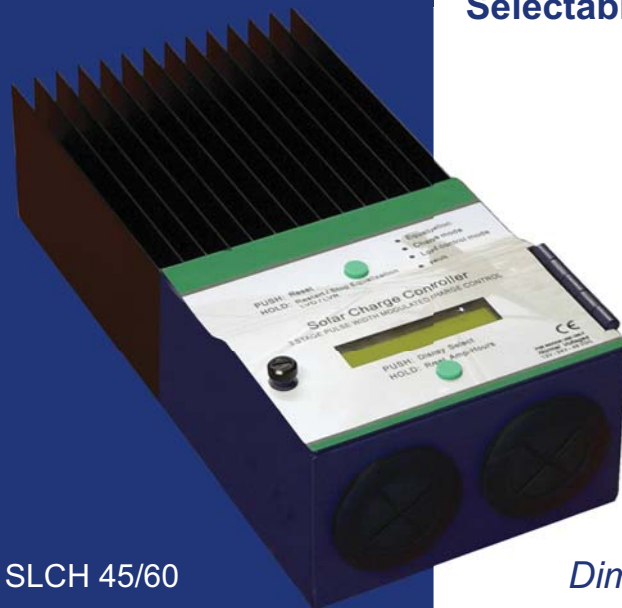

SLCH 45/60

Selectable 12/24/48 VDC Output - 45/60 Amp.

Maximum operating voltage 64V

Maximum PV open voltage 125V

Minimum voltage 9V

RS422 interface

3 Stage charger

LCD information Display

For Lead Acid & NiCad Batteries

Dimension - H/W/D 70x130x260mm - 2kg



SLCH40

Selectable 12/24 VDC Output - 40 Amp.

Maximum PV open voltage 55V

Minimum voltage 15V

RS232 interface

3 Stage charger

LED Information

For Lead Acid & NiCad Batteries

Dimension - H/W/D 70x140x210mm - 2kg



Vision UPS Systems

Duarrefstrooss 36
L-9944 Beiler
LUXEMBOURG

www.visionups.com